

TROTEC TTK900 MP Dehumidifier

The Dehumidifier with the Landcruiser "RELIABILITY"

The New Value for Money leader in the 110-litre class, reduce high levels of relative humidity in minimum time or easily keep large rooms dry – the TTK 900 is in its element.

Features

- High dehumidification performance even at low temperatures at 3 °C.
- Auto shut off, to protect from overheating, if temperatures falls below or exceed limits, the compressor will automatically switch off (Max 50°C).
- Delayed compressor start to protect the compressor and increase the lifespan.
- Status LED Light to indicate the operation status.
- Airflow Volume 600/850 m3/h
- Self-cleaning coils, washable pre-filters.
- Practical stacking groove for stable, space-saving storage and transportation.
- Super quiet, strong robust housing and components.
- Easy to remove pump out.
- Non-marking solid rubber tyres, carry handles and trolley design for easy manoeuvring and transportation.
- Self-cleaning coils, washable pre-filters.
- Auto Pump works with float (not timer) includes 10m clear hose.
- Operating hours and Kilowatt counter.
- 48 litres at 20 degrees and 60% relative humidity.

**Below Results based on 24hr testing*

Temperature	Relative Humidity						
	25%	30%	40%	50%	60%	80%	90%
600CMH							
26.7°C	7 litres	11 litres	29 litres		61 litres	87 litres	
40°C			45 litres	59 litres			
45°C		28 litres	36 litres				
850CMH							
10°C						35 litres	
20°C					48 litres		
35°C							110 litres




CREATING HEALTHY INDOOR ENVIRONMENTS

"On The Job" Industry Experience Since 1995

TROTEC Comparison

	TTK Qube	TTK175S	TTK355S	TTK500	TTK900
Minimum operating temperature	5° C	5° C	5° C	5° C	3° C
Maximum operating temperature	36° C	36° C	36° C	45° C	50° C
CMH airflow (Cubic meters per hour)	283CMH	580CMH	490CMH	400CMH	600/850CMH
Amperage draw normal running	1 to 1.5	2 to 2.5	4 to 5	4 to 5	5 to 7
Max Amperage draw	1.7	2.8	6.1	7.1	9.8
Noise Level (dBA)	53	52	54	54	59
Water removal at AHAM l/24hr 26.7c 60% RH	-	24	35	45	61
Dehumidification performance l/24hr	20	50	70	76	110
Weight	16kg	35kg	39kg	52kg	69kg
Dimensions (LxWxH) mm	315/382/340	390/380/643	390x380x725	470X438X870	500X565X960
Length of pump out hose	10m	10m	10m	10m	10m
Power cable length	3mt	5mt	5mt	5mt	5mt
Stackable	Y	Y	Y	Y	Y
Hour meter included (KWatts or Hour)	Kw/Hr	Kw/Hr	Kw/Hr	Kw/Hr	Kw/Hr
Humidistat Control	Y	Y	Y	Optional	Optional
Auto Pump Out	Y	Y	Y	Y	Y
Manual Pump Out	N	N	N	Y	Y
Filters	Washable Pre-Filters	Washable Pre-Filters	Washable Pre-Filters	Washable Pre-Filters	Washable Pre-Filters
Refrigerant Gas / Coolant Type	R1234yf	R290 (Propane)	R454C	R454C	R454C

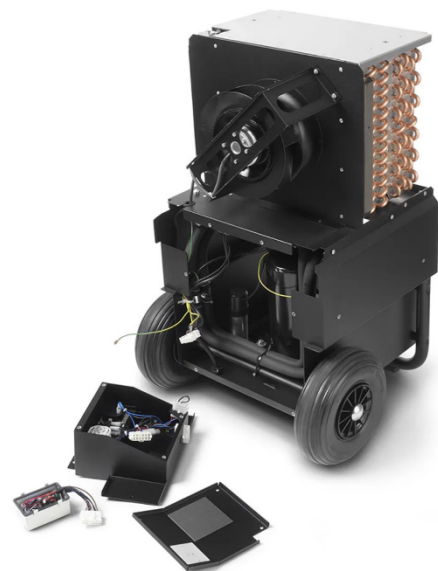

CREATING HEALTHY INDOOR ENVIRONMENTS

"On The Job" Industry Experience Since 1995

